



# PVDF Fluoropolymer Extruded Films

## POLYVINYLIDENE FLUORIDE FILM FOR USE IN HIGH PERFORMANCE APPLICATIONS

TCI's PVDF films are produced from Polyvinylidene Fluoride resins by melt extrusion casting process, and have characteristic stability of fluoropolymers to resist harsh thermal, chemical, and ultra-violet environments. TCI's PVDF films offer excellent weatherability, chemical and abrasion resistance, non-stick properties, and superior dielectric performance, combined with excellent processibility of conventional thermoplastic materials. PVDF films can be heat-sealed, thermoformed, and laminated to various substrates.

### Industries Served Include:

#### Chemical Processing and Liquid Storage

- Due to its superior chemical resistance to most acids and solvents, PVDF films are used as a contact surface for the production, storage and transfer of corrosive fluids, and find their applications in chemical tank linings, pump diaphragms, water treatment, and chemical storage bags.

#### Outdoor Protection


- Its excellent weatherability, U-V resistance and abrasion resistance make PVDF film very effective for over-laminating billboards, traffic signs and awnings

#### Decorative and Anti-Graffiti Applications

- Non-stick properties and excellent solvent resistance of PVDF films make them invaluable for covering high traffic areas that need to be frequently cleaned with aggressive solvents and cleaning solutions

#### Photovoltaic Panels

- Due to their excellent dielectric performance, fire resistance and high solar transmittance PVDF films are very well suited for use in the back sheet and front sheet glazing of PV panels. They are extensively used as an external material for the back sheet for protecting the PV Module from the external environment for an extended period of time.

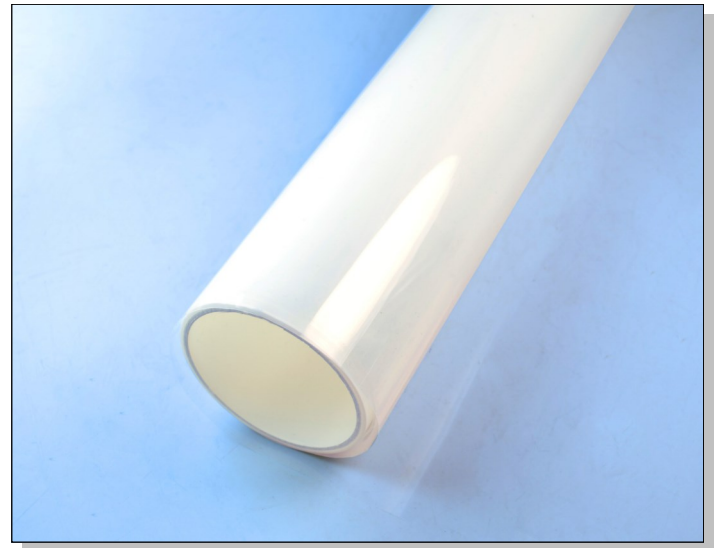

### TCI's PVDF Films Characteristics

- Outstanding weatherability and resistance to UV radiation
- Chemically inert and resistant to most chemicals
- Excellent fire resistance, UL V-0 rating
- Excellent abrasion resistance
- High dielectric strength
- Thermoformable and heat sealable
- Continuous service temperature up to 150°C (300°F)
- Superior anti-stick and low friction properties of a fluoropolymer

### TCI's PVDF Films - General Availability

- Thickness range from 0.001" to 0.010" (25 to 250 µm)
- Standard width: up to 60" (1,524 mm)
- Any slit widths available upon request
- Bondable (plasma treated or chemically etched) surfaces available

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.

TEXTILES COATED INTERNATIONAL | Manufacturer of High Performance Fluoropolymer Films, Composites, and Laminates

200 Bouchard Street, Manchester, NH 03103    PHONE: (603) 296-2221    FAX: (603) 296-2248    www.textilecoated.com



# PVDF Fluoropolymer Extruded Films

## POLYVINYLIDENE FLUORIDE FILM FOR USE IN HIGH PERFORMANCE APPLICATIONS

			PVDF KF
General Properties	Units	Test Method	
Specific Gravity		ASTM D792	1.78
Area Yield	ft <sup>2</sup> /lb/mil		108
Area Yield	m <sup>2</sup> /kg/25μ		22.2
Flammability		UL-94	V-0
Water Absorption	%		<0.04
<b>Mechanical Properties</b>			
Tensile Strength	psi (MPa)	ASTM D882	5000 - 7000 (35 - 48)
Elongation at Break	%	ASTM D882	250
Tensile Modulus	psi (MPa)	ASTM D882	290,000 (2000)
Folding Endurance (MIT)	cycles, ave.	ASTM D2176	>25,000
<b>Thermal Properties</b>			
Continuous Use Temp	°F (°C)	UL-746 B	300 (155)
Melt Point	°F (°C)	ASTM D3418	330 (165)
Coeff. of Lin. Thermal Expansion	in/(in °F)	ASTM D696	7x10 <sup>-5</sup>
<b>Electrical Properties</b>			
Dielectric Strength (1mil film)	v/mil (kv/mm)	ASTM D149	4000 (160)
Dielectric Constant 1kHz		ASTM D150	7.5
<b>Optical Properties</b>			
Refractive Index		ASTM D542	1.4
Solar Transmission	%	ASTM E424	90
<b>Product Offering</b>			
Width	inches (mm)		up to 60 (1,524)
Thickness	mils (μm)		1 - 10 (25 - 250)
Standard Colors			Clear
<b>Surface Treatments Available</b>			
Chemical Etching			•
Plasma Treatment			•
<b>Applications, Markets</b>			
Composite Molding Process: Release Films			
Chemical Process			•
Electrical / Electronics			•
Medical			•
Optical /Photovoltaics			•
Protective/Decorative			•

The above table contains typical representative values and is not to be used for product specification. Contact TCI for a formal specification.

This information is supplied in good faith and is based on information currently available. TCI makes NO WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING ANY WARRANTIES FOR FITNESS, OR USE FOR A PARTICULAR PURPOSE, OR OF ANY MERCHANTABILITY OR AGAINST INFRINGEMENT OR THE LIKE, unless expressly set forth herein.