



PANDUIT® HALAR** and TEFZEL*** Cable Ties

PAN-Ty® HALAR** Fluoropolymer Cable Ties



HALAR** Cable Ties are UL Listed and UL Recognized as: Suitable for use in Air Handling Spaces per NEC, Section 300-22 (c) and (d). Many inspectors look for the distinctive maroon color. HALAR** cable ties have a low smoke density rating and an excellent flammability rating of UL94V-0. Other applications include nuclear plants, chemical environments, telecommunications equipment, aerospace, high and low temperature environments.


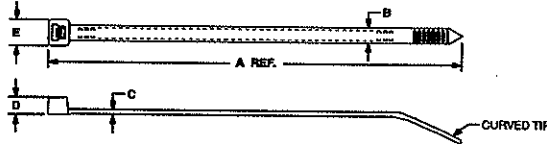


Part Number	Length A in. (mm)	Width B in. (mm)	Thickness C in. (mm)	Head Height D in. (mm)	Head Width E in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength Lbs. (N)	Recommended PANDUIT® Installation Tool Part No.	Packaging*					
									Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.		
MINIATURE CROSS SECTION														
PLT1M-C702	4.0 (102)	.098 (2.5)	.043 (1.1)	.186 (4.7)	.188 (4.8)	.87 (22)	18 (80)	GTS, GS2B, PTS, PPTS or STS2	100	1000	1000	25000		
STANDARD CROSS SECTION														
PLT2S-C702	7.4 (188)	.190 (4.8)	.055 (1.4)	.240 (6.1)	.320 (8.1)	1.88 (48)	50 (222)	GTS, GS2B, GTH, GS4H, PTS, PPTS, STS2 or STH2	100	1000	1000	10000		
PLT3S-C702	11.6 (295)		.059 (1.5)	3.00 (76)	100	1000							1000	5000

**HALAR is a registered trademark of Solvay Solexis, Inc.

PAN-Ty® TEFZEL*** Fluoropolymer Cable Ties


TEFZEL*** cable ties are ideal for applications requiring resistance to environmental stresses such as chemical attack, gamma radiation, ultraviolet radiation and extreme temperatures. In addition, TEFZEL*** has a UL Flammability rating of UL94V-0. TEFZEL*** ties have a distinctive aqua blue color.

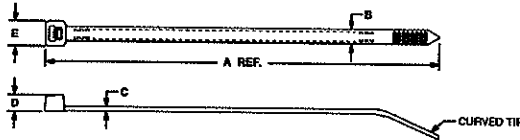

Part Number	Length A in. (mm)	Width B in. (mm)	Thickness C in. (mm)	Head Height D in. (mm)	Head Width E in. (mm)	Max. Bundle Dia. in. (mm)	Min. Loop Tensile Strength Lbs. (N)	Recommended PANDUIT® Installation Tool Part No.	Packaging*					
									Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.		
MINIATURE CROSS SECTION														
PLT1M-C76	4.0 (102)	.098 (2.5)	.043 (1.1)	.186 (4.7)	.188 (4.8)	.87 (22)	18 (80)	GTS, GS2B, PTS, PPTS or STS2	100	1000	1000	25000		
INTERMEDIATE CROSS SECTION														
PLT2I-C76	8.0 (203)	.135 (3.4)	.045 (1.1)	.180 (4.6)	.240 (6.1)	2.00 (51)	25 (111)	GTS, GS2B, PTS, PPTS or STS2	100	1000	1000	10000		
STANDARD CROSS SECTION														
PLT2S-C76	7.4 (188)	.190 (4.8)	.055 (1.4)	.240 (6.1)	.320 (8.1)	1.88 (48)	50 (222)	GTS, GS2B, GTH, GS4H, PTS, PPTS, STS2 or STH2	100	1000	1000	10000		
PLT3S-C76	11.6 (295)		3.00 (76)			100							1000	1000
PLT4S-C76	14.6 (371)	4.00 (102)	100	1000	1000	5000								
HEAVY CROSS SECTION														
PLT3H-L76	11.5 (292)	.300 (7.6)	.075 (1.9)	.360 (9.1)	.480 (12.2)	3.00 (78)	120 (534)	GTH, GS4H, GS4EH, PPTHEH or STH2	50	500	250	2500		
PLT4H-L76	14.6 (371)					4.00 (102)							50	500

***TEFZEL is a registered trademark of E. I. DuPont de Nemours Co.

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

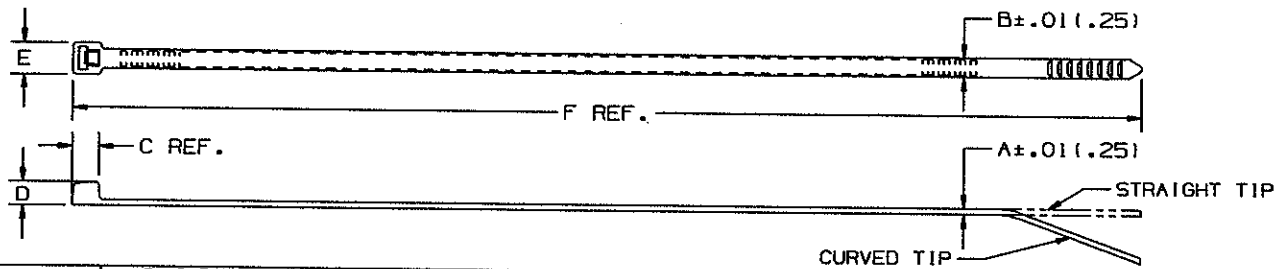

PANDUIT PART NO. *	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
PLT1M-76	.13 (3.3)	.87 (22)	.043 (1.1)	.098 (2.5)	.159 (4.0)	.186 (4.7)	.188 (4.8)	4.0 (102)	18 (80)	MINIATURE	CURVED	.09 (42)
PLT2I-76	.13 (3.3)	2.00 (51)	.045 (1.1)	.135 (3.4)	.200 (5.1)	.180 (4.6)	.260 (6.6)	8.0 (203)	30 (133)	INTERMEDIATE	CURVED	.28 (127)
PLT2S-76	.13 (3.3)	1.88 (48)	.055 (1.4)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	7.40 (188)	50 (222)	STANDARD	CURVED	.47 (213)
PLT3S-76	.13 (3.3)	3.00 (76)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	11.60 (295)	50 (222)	STANDARD	CURVED	.78 (352)
PLT4S-76	.13 (3.3)	4.00 (102)	.059 (1.5)	.190 (4.8)	.260 (6.6)	.240 (6.1)	.320 (8.1)	14.60 (371)	50 (222)	STANDARD	CURVED	.89 (404)
PLT3H-76	.25 (6.4)	3.00 (76)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	11.50 (292)	120 (534)	HEAVY	STRAIGHT	1.5 (687)
PLT4H-76	.25 (6.4)	4.00 (102)	.075 (1.9)	.300 (7.6)	.370 (9.4)	.360 (9.1)	.480 (12.2)	14.60 (371)	120 (534)	HEAVY	STRAIGHT	1.83 (830)

NOTES: DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

- *1) *SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.
- 2) MATERIAL HAS A UL RELATIVE THERMAL INDEX RATING OF 336°F (170°C).
- 3) MATERIAL FLAMMABILITY RATING: UL94V-0.
- 4) EXCELLENT RESISTANCE TO MOST CHEMICALS.
- **5) MINIMUM LOOP TENSILE RATING AT 73°F (23°C).
- 6) MEETS REQUIREMENTS OF IEEE 383 PANDUIT QUALIFICATION TEST REPORT NO. 42481.

CAGE CODE
06383

TITLE PAN-TY CABLE TIES - PLT ELEVATED TEMPERATURE SERIES		PANDUIT
CUSTOMER DRAWING		
ITEM REVISION NAME W1000BK/27	MATERIAL TEFZEL FLUOROPOLYMER COLOR: AQUA BLUE REG. T.M. OF DUPONT CO.	
DATE/REV FILE NAME W1000BK/27-SS-4994_REV27	DRAWING NUMBER SS-4994	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		
.X ± .0005	.XX ± .02(1.5)	XXX ± .020(1.5)
THIRD ANGLE PROJECTION		
DRAWN BY CEW	DATE 3-8-85	SCALE NONE
CHK HVP	SHT 1 OF 1	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
27	10/10/15	BWG	DJSL	JADE	REVISED NOTE 1 AND PLT2I MIN. TENSILE WAS 25 (11). UPDATED TITLE BORDER.	SS-4994/27